



Sovereign
Water Systems

TECNODYNE

TECNOBOOST 6

Permanent Magnet Variable Frequency Multistage Pumps 50/60Hz

PRODUCT CATALOGUE



PRODUCT OVERVIEW

Optimum Water Pressure

Product Description

TECNOBOOST 6 is an intelligent water pump assembled with high efficiency permanent magnet motor and variable frequency converter in one smart compact design to provide constant pressure boosting for domestic, residential and light commercial water applications.

It is designed to increase water pressure from roof tank, break tank, ground tank, city mains and shallow wells.




Applications

TECNOBOOST 6 is an ideal solution for boosting water pressure in:


- Single family house, apartments, villas, townhomes.
- Small residential buildings (with max. 3 floors & 10 outlets)
- Light commercial applications.

Model Description

TECNOBOOST 6

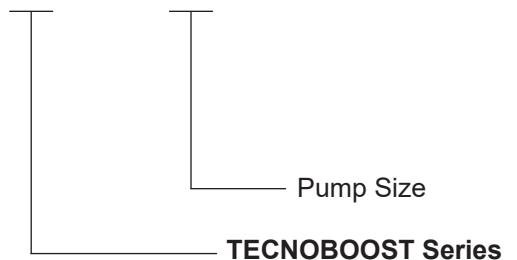

Performance Curve

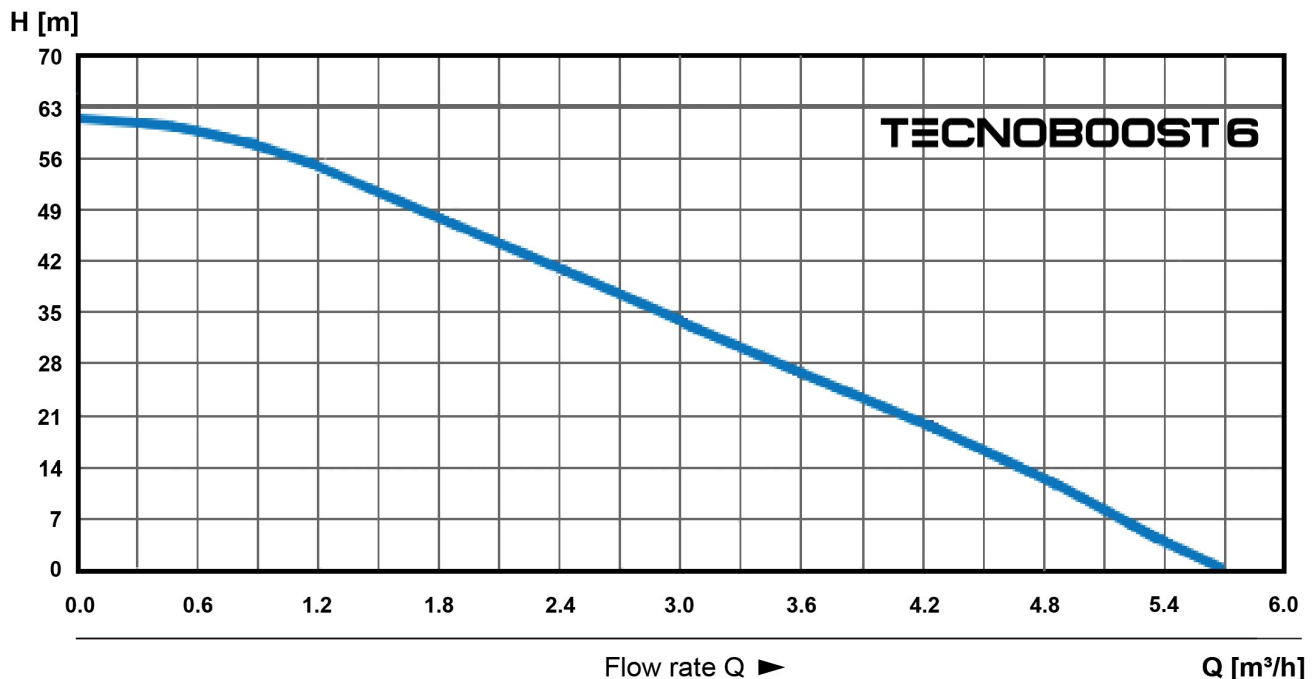

FEATURES & ADVANTAGES

Innovation is our beating heart

Key Features:

- Intelligent operation, variable speed control.
- Smart compact design makes installation possible in tight spaces.
- Low-noise operation.
- Air-cooled permanent magnet motor.
- Self-priming up to 8 m.
- Energy saving thanks to integrated inverter technology.
- Built-in pressure tank reduces the number of starts & stops.
- High quality components.
- Multiple protection including dry-run protection.
- Plug and play, quick to install.
- Easy to use LED display control panel with push buttons.

Material of Construction:

Pump body: Stainless Steel
Impeller: PPO
Shaft: Stainless Steel
Mechanical seal: Carbon/Ceramic

Marking & Certification



TECHNICAL DATA

Modern & Reliable

Technical Data


Product Model	TECNOBOOST 6
Pump type	Centrifugal, Multistage Pump
Pumped fluid	Clean Water (non-aggressive, free of solids)
Pump control	Variable Speed
Max. system pressure	10 bar
Max. inlet pressure	4 bar
Maximum suction lift	8 m
Min / Max. ambient temperature	4 °C / 55 °C
Max fluid temperature	75 °C
Noise level	≤ 52 db(A) in typical use
Protection class	IPX6
Inlet / outlet diameter	G 1" (Female)
Installation	Horizontal Installation
Power cable length	1.5 m

Motor Data

Motor	Permanent Magnet Motor
Max speed	5200 rpm
Winding	Copper
Motor duty	S1 (Continuous Operation)
Motor cooling	Air-cooled
Insulation class	F

INTELLIGENT OPERATION

Friendly user control panel

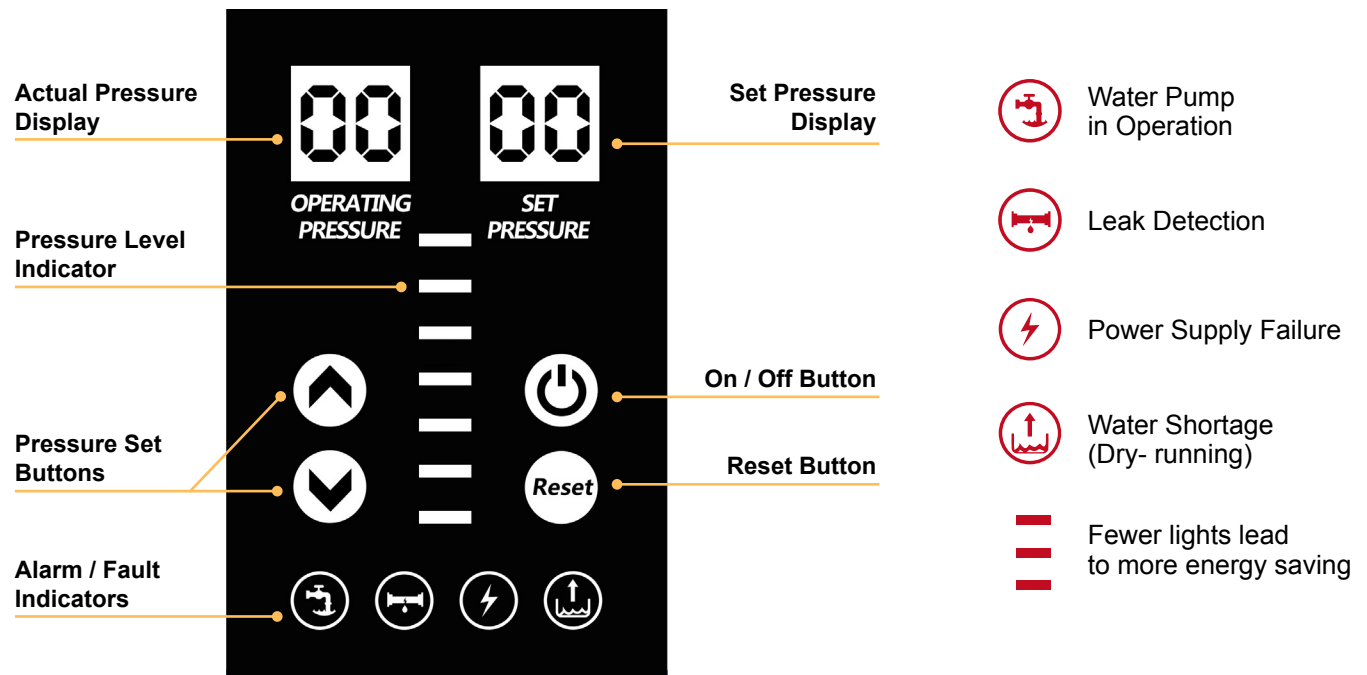


TECNOBOOST 6 monitors the water pressure in real-time and automatically adjusts it to meet the water demand. Thanks to inverter technology, the pump draws only the necessary power according to water requirements allowing considerable energy savings.




DIMENSIONAL DRAWING

Smart Compact Design

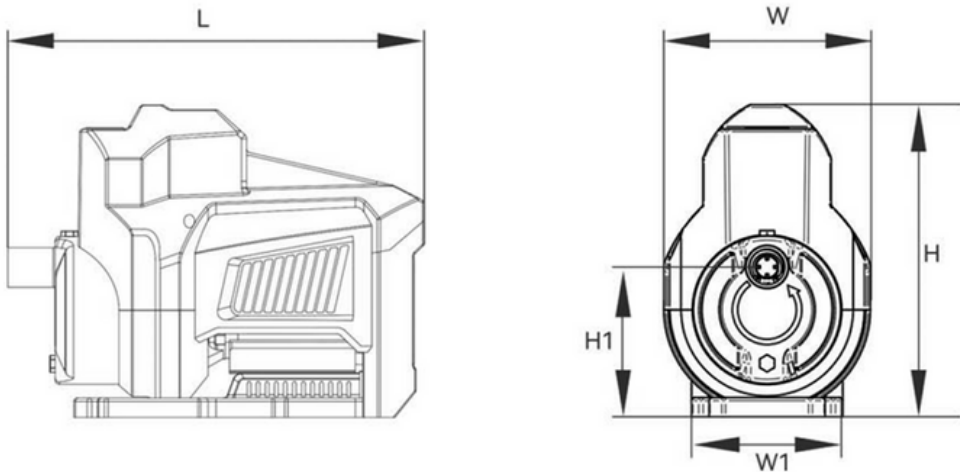


Product Model	Nominal Diameter		Length	Width		Height		Net Weight
	Inlet [mm]	Outlet [mm]	L [mm]	W [mm]	W1 [mm]	H [mm]	H1 [mm]	Kg
TECNOBOOST 6	25	25	390	194	142	290	140	8.5

Baseplate Dimensional Drawing

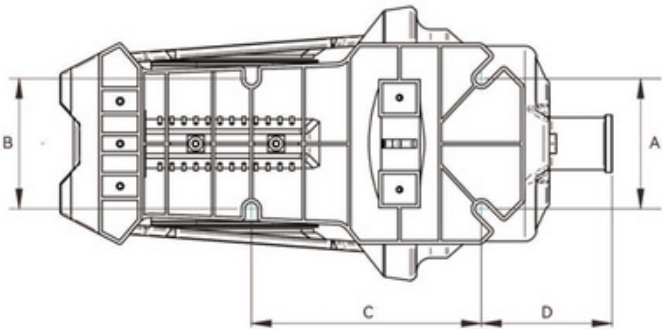

A [mm]	B [mm]	C [mm]	D [mm]
92	92	162.5	92.5

TECNODYNE

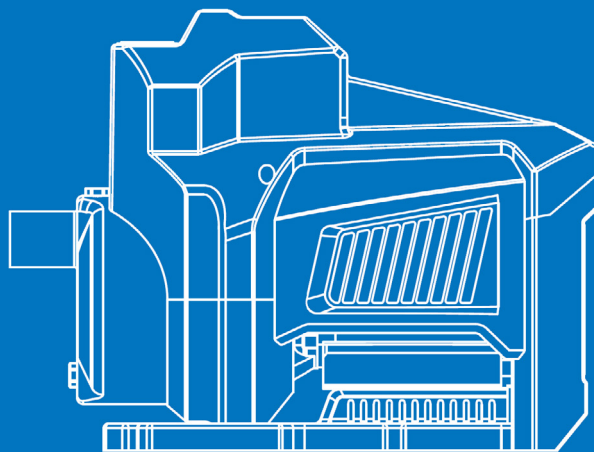

TECNODYNE PUMPS INC.

02 Sheppard Ave E, North York
Ontario, Canada M2N 5Y7
T: +1 (647) 255-2270
info@tecnodyne.ca
www.tecnodyne.ca