

HydroTap G5 Celsius Arc boiling 160 plus hot & cold (mains)

Boiling

Finish: Brushed Chrome

Product code: H58708Z01UK

Capacity: Up to 60 Users

If you need just one tap for everything, look no further than the HydroTap Celsius Arc. Offering you instant filtered boiling water alongside unfiltered hot and cold water for washing up, the Celsius Arc features our market-leading 0.2 micron MicroPurity filtration technology - 25 times more effective filtration than a standard water filter jug - to make it the best of any instant filtered water tap in the world. For peace of mind in the workplace, the Celsius Arc is designed to be completely safe and easy to use, with boiling water safety locks and cool touch technology. What's more, the HydroTap features superior technology to conserve water while saving energy and time.

Details

Features & benefits

Ease and convenience - Offering instant filtered boiling water alongside unfiltered hot and cold water for washing up.
Advanced filtration - Market leading 0.2 micron MicroPurity filtration technology filters out dirt, lead, cysts and microplastics, providing 25 times more effective filtration than a standard water filter jug.
Unique user-safety options - Designed with safety in mind, the Zip HydroTap features cool touch tap and safety lock features to enhance the user experience. The boiling point is factory set to 98°C to ensure smooth, safe, non-sputtering water delivery.
Power-Pulse technology - Minimises power consumption by regulating power during heating and maintains stored boiling water to within 0.2°C of set temperature, meaning water is always dispensed at the desired temperature.

Specifications

Product name	HydroTap G5 Celsius Arc boiling 160 plus hot & cold (mains)
Product code	H58708Z01UK
Filtered water type	BHA
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

Capacity, weight & dimensions

Number of people	Up to 60 Users
Boiling cups per hour	190

Plumbing

Water supply requirements	Cold & Hot
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 1.7 bar - Max 5 bar

Electrical

Power rating	1.8kW 230v 50/60 Hz
Power supply/voltage	FALSE

Tap design

Tap	HydroTap Celsius Arc brushed chrome
HydroTap style	Celsius Arc
Finish	Brushed Chrome
Disability options	No
Tap rotation	180°
Installation hole size	35mm

Command centre


Dimensions	W280mm x D313mm x H333mm
Factory temperature boiling	98°C
Filtration	Internal Zip MicroPurity 0.2 micron 0.2 micron filter
Flow rate	4 l/min
Weight	11
Tank material	PPS

Installation

Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipindustries.co.uk'

Files

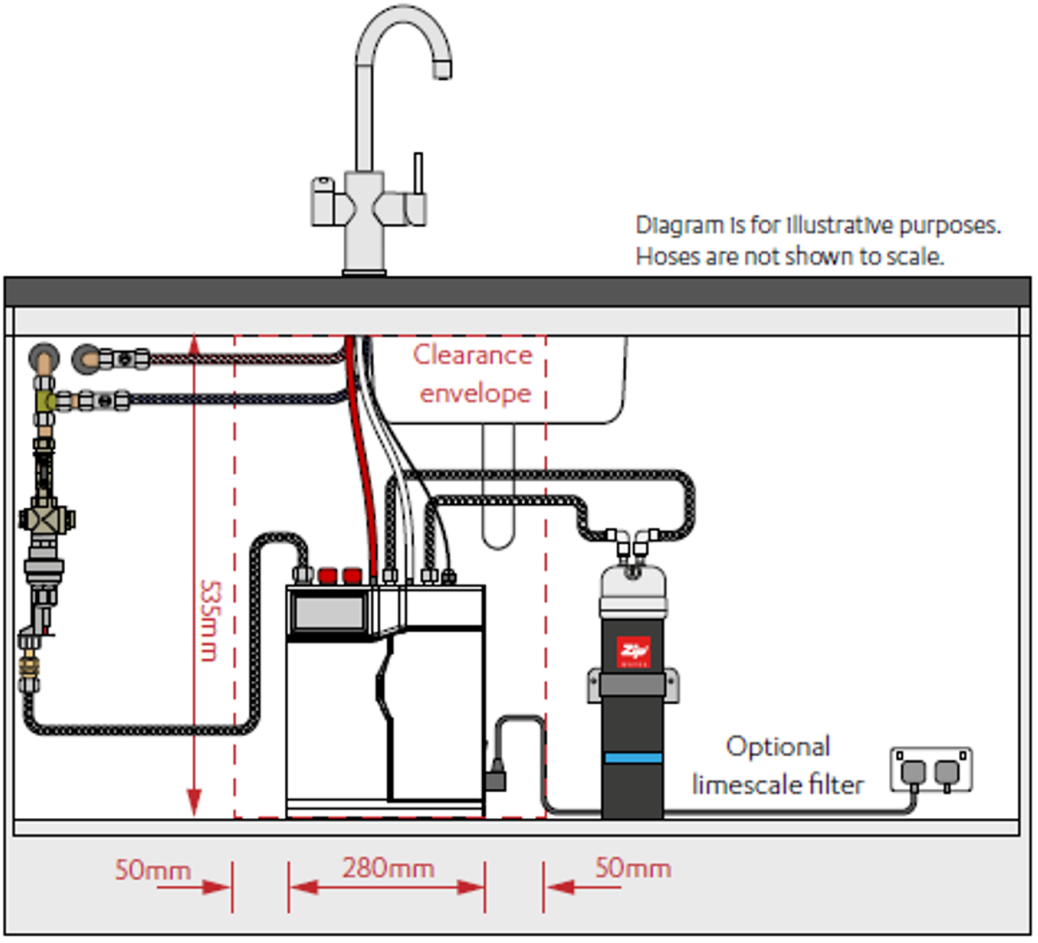

B160, B Res HydroTap boiling with mains mixer tap models

Command centre diagram 2

Tap diagram

Certifications

BIM files



ArchiCAD Zip Water Library (LCF)



Revit Virtual Showroom (RVT)

Download all

Manuals



Quick guide (PDF)



Tap manual (PDF)



Tap operation label (PDF)



Instruction manual (PDF)



User manual (PDF)

Download all

Brochure



Product brochure (PDF)

Accessories

This image is currently unavailable

95593ZUK Zip HydroTap G4 & G5 Limescale filter kit for work