

HydroTap G5 All-in-One Celsius Plus boiling chilled sparkling 240/175 plus hot & cold

Make a bold design statement with HydroTap Celsius Plus All-in-One. The ultimate in drinking water systems for the home, the beautifully engineered new All-in-One system delivers instant, pure-tasting filtered boiling, chilled and sparkling drinking water, operated via a touchpad handle.

Boiling | Chilled | Sparkling

Finish: Brushed Chrome

Product code: H5M763Z01UK

Capacity: Up to 100 Users

Details

Features & benefits

Our latest tap is powered by our clever command centre, now in its 5th generation
Our boiling safety lock protects young or vulnerable users, offering complete peace of mind for the whole family
Our subtle outlet spout houses an aerator specially developed to optimise the delivery of sparkling water
Our system is designed to deliver a smooth flow of boiling water, factory set at an optimised 98°c

Specifications

Product name	HydroTap G5 All-in-One Celsius Plus boiling chilled sparkling 240/175 plus hot & cold
Product code	H5M763Z01UK
Filtered water type	BCSHA
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

Capacity, weight & dimensions

Number of people	Up to 100 Users

Plumbing

Water supply requirements	Cold & Hot
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 2.5 bar - Max 5 bar

Electrical

Power rating	2.3kW 230v 50/60 Hz
Power supply/voltage	1 × 13 amp

Tap design

Tap	HydroTap Celsius Plus All-in-One
HydroTap style	Celsius Plus All-In-One
Finish	Brushed Chrome
Disability options	No
Tap rotation	180°
Installation hole size	50mm

Command centre


Dimensions	W395mm x D487mm x H333mm
Factory temperature boiling	98°C
Factory temperature chilled	6-10°C
Filtration	Internal Zip MicroPurity 0.2 micron 0.2 micron filter
Flow rate	Boiling - 4 l/min Chilled - 4 l/min Sparkling 1.6 l/min
Refrigerant	R290
Weight	39
Tank material	Stainless Steel

Installation

Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipindustries.co.uk'

Files

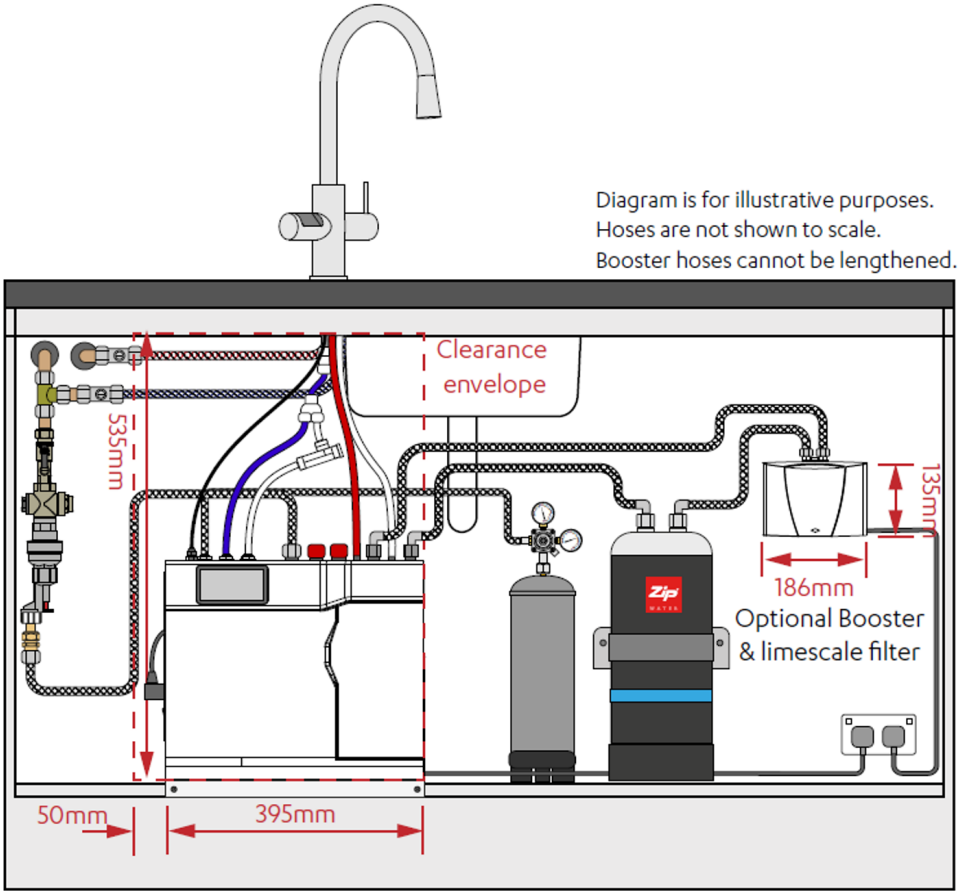

BCS240 /175 CPAIO tap

Certifications





Declaration of Conformity (PDF)




WRAS certificate (PDF)

BIM files



ArchiCAD Zip Water Library (LCF)



IFC (ZIP)



Revit Virtual Showroom (RVT)

Download all

Manuals



Quick guide (PDF)



Instruction manual (PDF)



User manual (PDF)

Download all

Accessories

Accessories	95593