

HydroTap G5 Classic Plus boiling chilled 100/75

Boiling Chilled

Finish: Bright Chrome

Product code: H55702Z00UK

Capacity: Up to 20 Users

The world's most advanced drinking water system, the HydroTap Classic Plus delivers a choice of instant filtered boiling and chilled water for workplaces of all sizes. From a single tap and under counter command centre, the Classic Plus dispenses only the purest tasting water, filtered to a market-leading 0.2 micron - 25 times more effective than a standard water filter jug. To prioritise user safety, the HydroTap doesn't splash or spit when dispensing water, and features two boiling water safety modes and a cool to touch tap. What's more, the HydroTap features superior technology to conserve water while saving energy and time.

Details

Features & benefits

Advanced filtration - Market leading 0.2 micron MicroPurity filtration technology filters out dirt, lead, cysts and microplastics, providing 25 times more effective filtration than a standard water filter jug.
Environmentally conscious operation - The HydroTap employs water-conserving air-cooled chilling technology with R290 refrigerant and energy saving sleep modes for maximum efficiency.
Unique user-safety options - Designed with safety in mind, the Zip HydroTap features cool touch tap and safety lock features to enhance the user experience. The boiling point is factory set to 98°C to ensure smooth, safe, non-sputtering water delivery.
Enhanced hygiene - The 5th generation HydroTap command centre has SteriTouch embedded in key components of the water path. This reduces surface bacteria by 99.99%.
Power-Pulse technology - Minimises power consumption by regulating power during heating and maintains stored boiling water to within 0.2°C of set temperature, meaning water is always dispensed at the desired temperature.

Specifications

Product name	HydroTap G5 Classic Plus boiling chilled 100/75
Product code	H55702Z00UK
Filtered water type	BC
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

Capacity, weight & dimensions

Number of people	Up to 20 Users
Boiling cups per hour	100
Chilled cups per hour	75

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 1.7 bar - Max 5 bar

Electrical

Power rating	1.9kW 230v 50/60 Hz
Power supply/voltage	1 × 13 amp

Tap design

Tap	HydroTap Classic Plus bright chrome
HydroTap style	Classic Plus
Finish	Bright Chrome
Disability options	No
Tap rotation	Fixed
Installation hole size	35mm

Command centre


Dimensions	W280mm x D478mm x H333mm
Factory temperature boiling	98°C
Factory temperature chilled	6-10°C
Filtration	Internal Zip MicroPurity 0.2 micron 0.2 micron filter
Flow rate	Boiling - 4 l/min Chilled - 4 l/min
Refrigerant	R290
Weight	22
Tank material	PPS

Installation

Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipindustries.co.uk'

Files

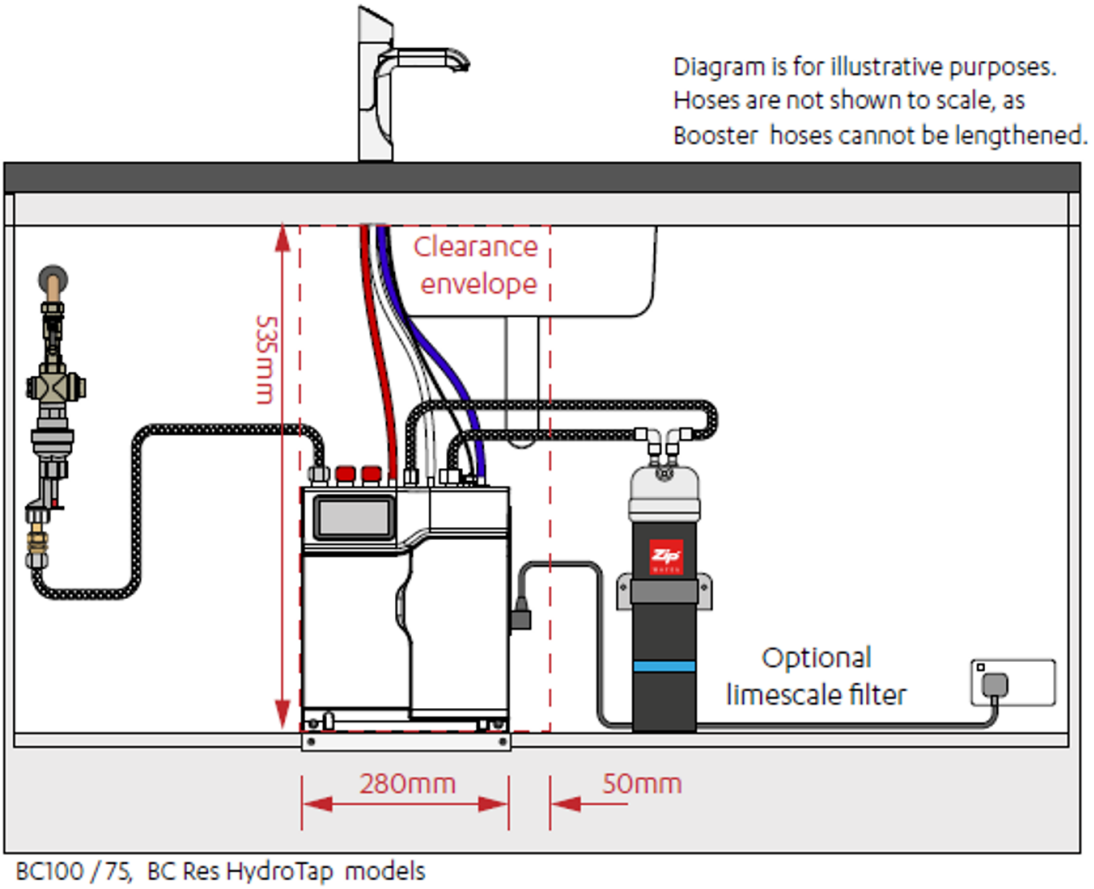

BC100 / 75, BC Res HydroTap models

- Command centre diagram 2
- Font diagram 2
- Tap & font diagram
- Tap diagram
- Tap extension piece diagram