

HydroTap G5 Classic Plus boiling chilled 240/175

Boiling Chilled

Finish: Bright Chrome

Product code: H55705Z00UK

Capacity: Up to 100 Users

The world's most advanced drinking water system, the HydroTap Classic Plus delivers a choice of instant filtered boiling and chilled water for workplaces of all sizes. From a single tap and under counter command centre, the Classic Plus dispenses only the purest tasting water, filtered to a market-leading 0.2 micron - 25 times more effective than a standard water filter jug. To prioritise user safety, the HydroTap doesn't splash or spit when dispensing water, and features two boiling water safety modes and a cool to touch tap. What's more, the HydroTap features superior technology to conserve water while saving energy and time.

Details

Features & benefits

Advanced filtration - Market leading 0.2 micron MicroPurity filtration technology filters out dirt, lead, cysts and microplastics, providing 25 times more effective filtration than a standard water filter jug.
Environmentally conscious operation - The HydroTap employs water-conserving air-cooled chilling technology with R290 refrigerant and energy saving sleep modes for maximum efficiency.
Unique user-safety options - Designed with safety in mind, the Zip HydroTap features cool touch tap and safety lock features to enhance the user experience. The boiling point is factory set to 98°C to ensure smooth, safe, non-sputtering water delivery.
Enhanced hygiene - The 5th generation HydroTap command centre has SteriTouch embedded in key components of the water path. This reduces surface bacteria by 99.99%.
Power-Pulse technology - Minimises power consumption by regulating power during heating and maintains stored boiling water to within 0.2°C of set temperature, meaning water is always dispensed at the desired temperature.

Specifications

Product name	HydroTap G5 Classic Plus boiling chilled 240/175
Product code	H55705Z00UK
Filtered water type	BC
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

Capacity, weight & dimensions

Number of people	Up to 100 Users
Boiling cups per hour	240
Chilled cups per hour	175

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 1.7 bar - Max 5 bar

Electrical

Power rating	2.1kW 230v 50/60 Hz
Power supply/voltage	2 × 13 amp
Booster power rating	2.2kW at 230V

Tap design

Tap	HydroTap Classic Plus bright chrome
HydroTap style	Classic Plus
Finish	Bright Chrome
Disability options	No
Tap rotation	Fixed
Installation hole size	35mm

Command centre


Dimensions	W394mm x D487mm x H373mm
Factory temperature boiling	98°C
Factory temperature chilled	6-10°C
Filtration	Internal Zip MicroPurity 0.2 micron 0.2 micron filter
Flow rate	Boiling - 4 l/min Chilled - 4 l/min
Refrigerant	R290
Weight	28
Tank material	PPS

Installation

Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipindustries.co.uk'

Files

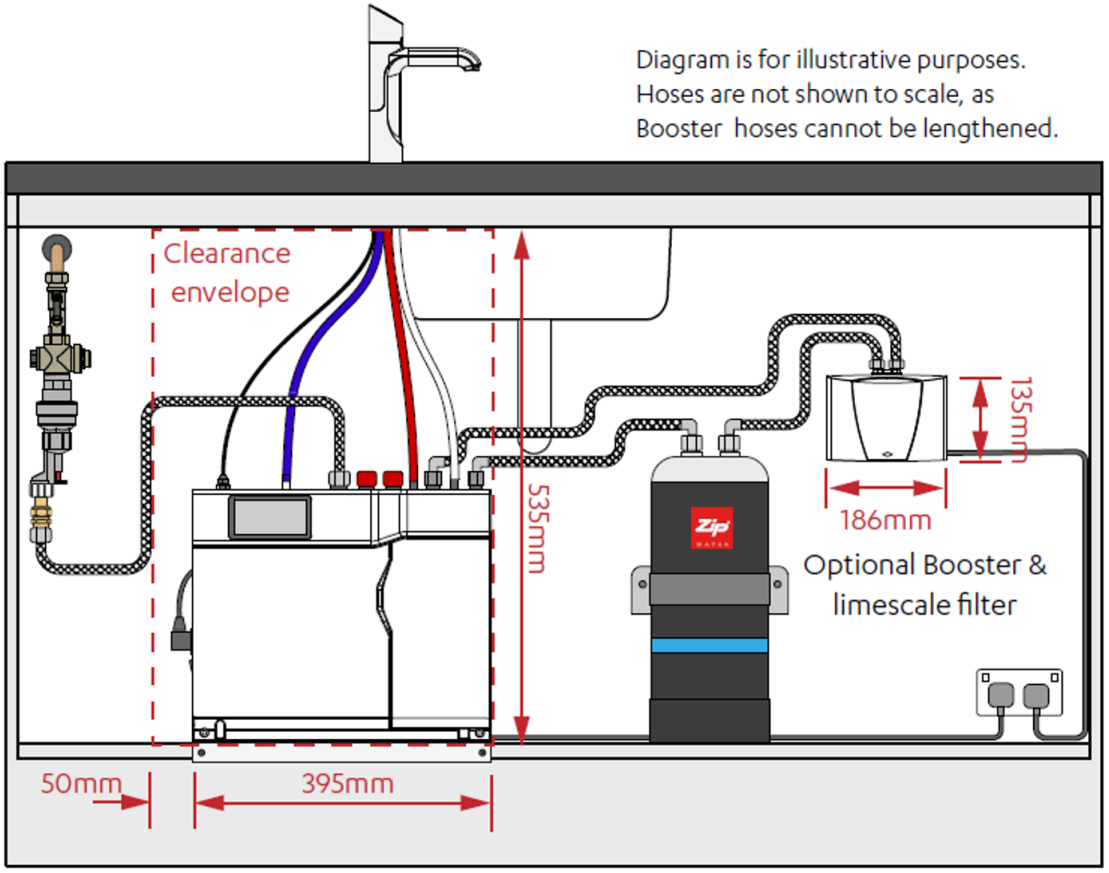

BC240 /175 HydroTap

- Command centre diagram 2
- Command centre diagram 3
- Font diagram 2
- Tap & font diagram
- Tap diagram
- Tap extension piece diagram

Certifications





Declaration of Conformity (PDF)



WRAS certificate (PDF)


BIM files



ArchiCAD Zip Water Library (LCF)



AutoCAD Plan (ZIP)



IFC (ZIP)



Revit Product File (ZIP)



Revit Virtual Showroom (RVT)

Download all

Manuals



Quick guide (PDF)



Tap manual (PDF)



Tap operation label (PDF)



Instruction manual (PDF)



User manual (PDF)

Download all

Brochure



Product brochure (PDF)

Accessories

This image is currently unavailable	95592ZUK	Zip HydroTap G4 & G5 Limescale filter kit for work light usage
This image is currently unavailable	95593ZUK	Zip HydroTap G4 & G5 Limescale filter kit for work
	95276ZUK	135mm tap extension piece Bright Chrome