

HydroTap G5 Cube Plus boiling chilled sparkling 240/175

Boiling | Chilled | Sparkling

Finish: Matt Black

Product code: H5C763Z03UK

Capacity: Up to 100 Users

Provide instant filtered boiling, chilled and sparkling tap water for your office or workplace with the Zip Water HydroTap Cube Plus in matt black.

Details

Features & benefits

Advanced filtration - Market leading 0.2 micron MicroPurity filtration technology filters out dirt, lead, cysts and microplastics, providing 25 times more effective filtration than a standard water filter jug.
Enhanced hygiene - The 5th generation HydroTap command centre has SteriTouch embedded in key components of the water path and in the Classic Plus touchpad. This reduces surface bacteria by 99.99%.
Environmentally conscious operation - The HydroTap employs water-conserving air-cooled chilling technology with R290 refrigerant and energy saving sleep modes for maximum efficiency.
Unique user-safety options - Designed with safety in mind, the Zip HydroTap features boiling isolation, cool touch tap and safety lock features to enhance the user experience. The boiling point is factory set to 98°C to ensure smooth, safe, non-sputtering water delivery.
Power-Pulse technology - Minimises power consumption by regulating power during heating and maintains stored boiling water to within 0.2°C of set temperature, meaning water is always dispensed at the desired temperature.

Specifications

Product name	HydroTap G5 Cube Plus boiling chilled sparkling 240/175
Product code	H5C763Z03UK
Filtered water type	BCS
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

Capacity, weight & dimensions

Number of people	Up to 100 Users
Boiling cups per hour	240
Chilled cups per hour	175
Combined chilled and sparkling cups per hour	175

Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 2.5 bar - Max 5 bar

Electrical

Power rating	2.15kW 230v 50/60 Hz
Power supply/voltage	2 × 13 amp
Booster power rating	2.2kW at 230V

Tap design

Tap	HydroTap Cube Plus matt black
HydroTap style	Cube Plus
Finish	Matt Black
Disability options	No
Tap rotation	Fixed
Installation hole size	35mm

Command centre


Dimensions	W395mm x D487mm x H333mm
Factory temperature boiling	98°C
Factory temperature chilled	6-10°C
Filtration	Internal Zip MicroPurityâ€š 0.2 micron filter
Flow rate	Boiling - 4 l/min Chilled - 4 l/min Sparkling 1.6 l/min
Refrigerant	R290
Weight	39
Tank material	PPS

Installation

Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipindustries.co.uk'

Files

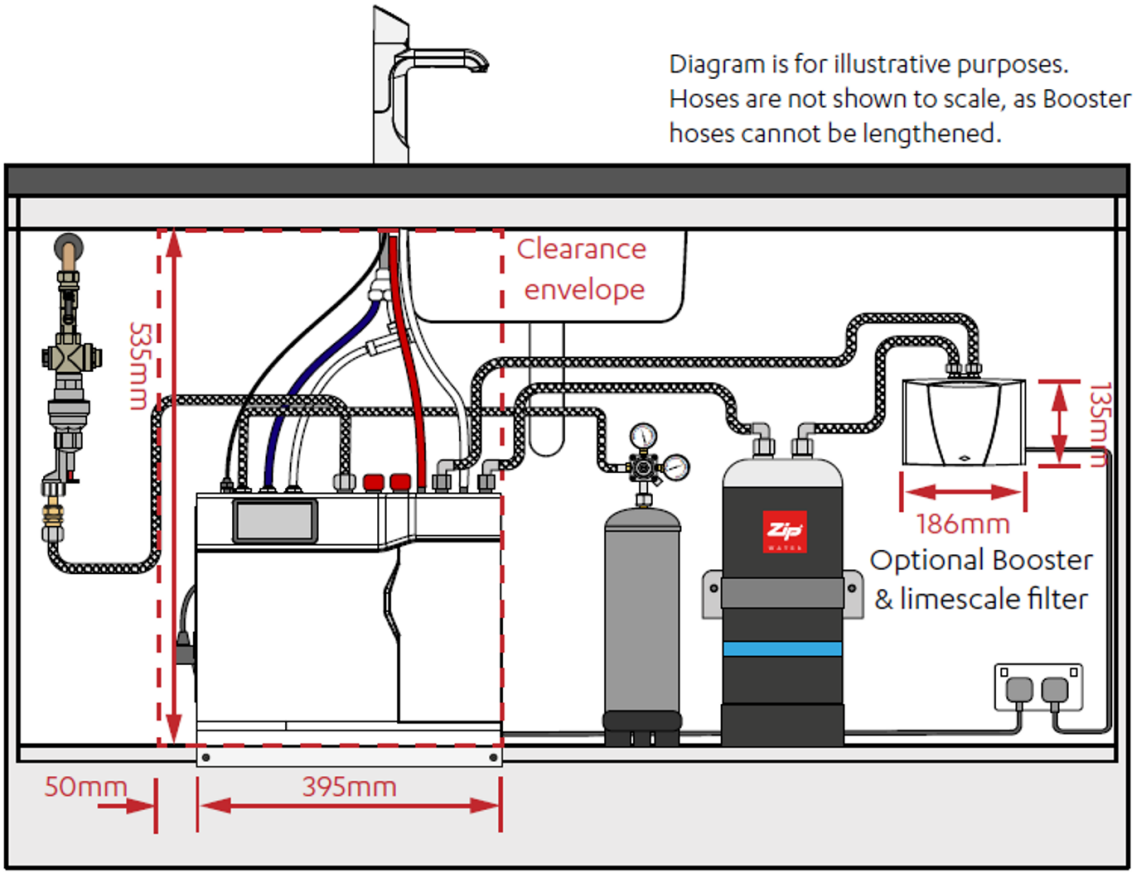

BCS240 /175 HydroTap G5 models

- Command centre diagram 2
- Command centre diagram 3
- Tap & font diagram
- Tap diagram

Certifications





Declaration of Conformity (PDF)



WRAS certificate (PDF)

BIM files



ArchiCAD Zip Water Library (LCF)

IFC (ZIP)



Revit Virtual Showroom (RVT)

Download all

Manuals



Quick guide (PDF)



Tap manual (PDF)



Tap operation label (PDF)



Instruction manual (PDF)



User manual (PDF)

Download all

Brochure



Product brochure (PDF)